PRODUCT INSTRUCTION SHEET

REFERENCE Bed Support (120)
Bed Support with straps (120S)

DESCRIPTION

Robust instantly adjustable bed support rail
Wooden base slides between mattress and
bed frame. Vertical bar (white) rests against
mattress edge to provide a side supporting hand rail

TECHNICAL SPECIFICATIONS

Leverage:	22 stone (140kg)
Adjustable range:	140mm – 460mm
Base size:	350mm – 605mm
Product weight:	2.9kg

USAGE REQUIREMENTS

1. When fitting a 120 or 120S Bed Support a risk assessment should be carried out as to the suitability of the equipment for the user, with particular emphasis on the possibility of entrapment.
2. If height adjustment has to be made, ensure that there is no gap between horseshoe clip and frame. The clip spindle must be fully located right through the outside frame.
3. Ensure the base support (wooden) is firmly pushed right under the mattress and the vertical bed rests against mattress edge.
4. The base support (wooden) must rest in a horizontal position and its position must be checked regularly in line with the findings of the original risk assessment.
5. Do not exceed leverage of 22 stone (140kg)
6. Clean steel work with cream cleaner
7. When using straps, please refer to fittings instructions.

Fitting instructions for; Bed Support (120)
Bed Support + Straps (120S)

When fitting a Bed Support a risk assessment should be carried out as to the suitability of the equipment for the user. Particular consideration should be given to the risk of entrapment.

To Fit Bed Support (120)

Your Bed Support may be supplied either assembled or unassembled. If your Bed Support is received unassembled follow these instructions.

1. Remove the E Clips from the U shaped metal bar.
2. Push the ends of the bar in the holes of the wooden base, making sure that the pinewood block is on the underside and that the rail has been fitted through the pinewood base first. The plywood base is the top.
3. Replace the E clips and adjust to the height required.
4. Slide the base of the Bed Support between the bed base and the mattress, making sure that it is fitted at the appropriate position for the user to get maximum benefit. N B The board position should be checked and adjusted regularly.

To Fit Bed Support With Straps (120S)

The product will always be supplied with the straps fitted. Assemble as above, then;

1. Remove the mattress from the bed.
2. Place the Bed Support in position. This should be the most comfortable and practical position for the user. If in doubt about the position, consult your Occupational Therapist.
   NB The short straps should hang down the side of the bed.
3. Pass the long straps across the top of the bed, down the side, and back under the bed. Secure the buckles (see figures 2&3). These straps will fit double or single beds.
4. Shorten the male ends of the straps adjusting through the male part of the buckle.
5. Make sure that when the buckle is joined the straps are tight around the bed.
6. Ensure there are no twists in the straps.
7. Make a final check for tightness and security.
8. Replace the mattress.
9. Use strap slips to secure and tidy any loose ends.
10. Adjust handle to the correct height for the user.

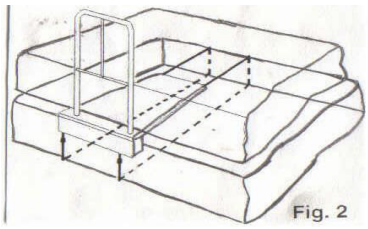
Fig. 2


Fig. 3